


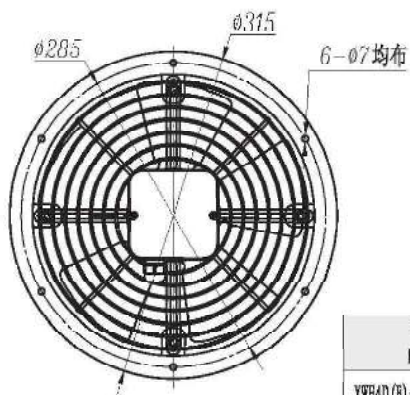


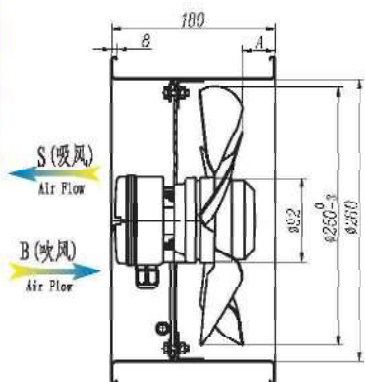

型号 MODEL	尺寸 A
YWF4D(R)-250S(R)-HSZ	41
YWF2D(R)-250S(B)-HSZ	31


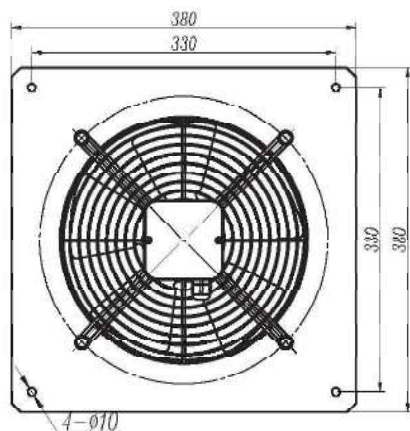


型号 MODEL	尺寸		
	A	B	C
YWF4D(R)-250S(B)-GSZ	145	82.5	5.5
YWF2D(R)-250S(B)-GSZ	155	92.5	3

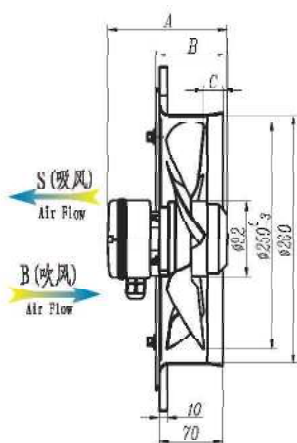

- 防护等级: IP54
Type of protection: IP54
- 绝缘等级: "B" "F"
Insulation class: "B" "F"
- 工作方式: S1
Mode of operation: S1
- 轴承: 免维护轴承
Bearings: Maintenance-free bearings



— 50Hz
--- 60Hz

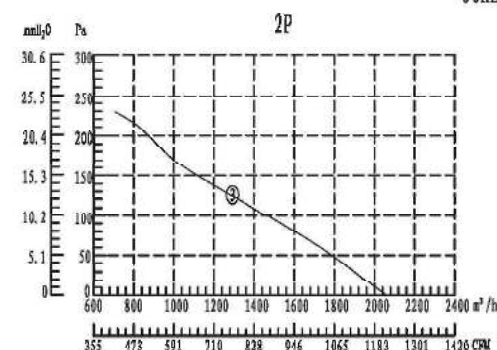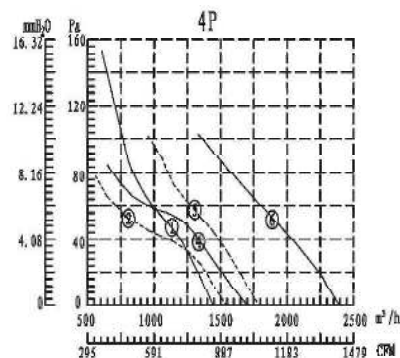



技术参数 Technical data

型号 Model	曲线 Curve NO.	额定电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Power input	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 / 允许静压 Air Volume / Max static Pressure	净重 N.W.
	#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa	kg
YWF4D-300-B5Z	①	380	50	0.22	70	1440	60	/	1450 / 60	3.2
	②	400	60	0.18	85	1600	62	/	1525 / 68	3.2
YWF4B-300-B5Z	①	220	50	0.4	80	1380	60	2	1450 / 60	3.2
	②	230	60	0.52	110	1500	62	2	1525 / 68	3.2
YWF2D-300-B5L	③	380	50	0.5	250	2500	70	/	2065 / 100	3.3
YWF2B-300-B5L	④	220	50	0.85	180	2300	70	8	2165 / 105	3.3
YWF4B-300M-B6L	④	220	50	0.42	85	1400	68	3	1700 / 65	3.6
	⑤	230	60	0.36	80	1700	70	2.5	1785 / 60	3.6
YWF4D-300M-B6L	④	380	50	0.2	70	1400	68	/	1700 / 65	3.6
YWF4B-300F-B5F	⑥	220	50	0.44	93	1330	60	2.5	2390 / 60	3.2
YWF4D-300F-B5F	⑥	220	50	0.23	85	1360	60	/	2390 / 60	3.2

• 表中参数如有更改恕不另行通知 We will not inform you if we change the data in the form


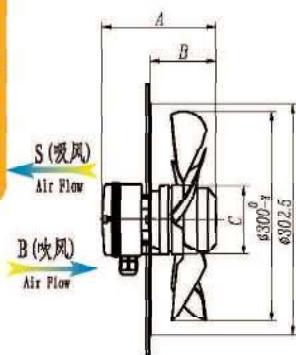


型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D (R)-300S (B) -BSZ	155	90	92	5	
YWF2D (R)-300S (B) -BSL	162	97	92	5	
YWF4D (R)-300MS (B) -B6L	175.5	110.5	102	6	
YWF4D (R)-300PS (B) -BSL	155	90	92	5	





型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D (R)-300S (B) -CSZ	155	120	92	5	
YWF2D (R)-300S (B) -CSL	162	127	92	5	
YWF4D (R)-300MS (B) -C6L	175.5	140.5	102	6	
YWF4D (R)-300PS (B) -CSL	155	120	92	5	



Model NO. B	Model NO. C	Model NO. D	Model NO. E	Model NO. H	Model NO. G	Model NO. K
YWF4D (R)-300S (B) -BSZ	YWF4D (R)-300S (B) -CSZ	YWF4D (R)-300MS (B) -BSZ	YWF4D (R)-300MS (B) -BSL	YWF4D (R)-300MS (B) -BSZ	YWF4D (R)-300MS (B) -BSL	/
YWF2D (R)-300S (B) -BSL	YWF2D (R)-300S (B) -CSL	YWF2D (R)-300MS (B) -BSL	YWF2D (R)-300MS (B) -BSL	YWF2D (R)-300MS (B) -BSL	YWF2D (R)-300MS (B) -BSL	/
YWF4D (R)-300MS (B) -B6L	YWF4D (R)-300MS (B) -C6L	YWF4D (R)-300MS (B) -D6L	YWF4D (R)-300MS (B) -B6L	YWF4D (R)-300MS (B) -B6L	YWF4D (R)-300MS (B) -B6L	/
YWF4D (R)-300PS (B) -BSZ	YWF4D (R)-300PS (B) -CSZ	YWF4D (R)-300PS (B) -BSL	YWF4D (R)-300PS (B) -BSL	YWF4D (R)-300PS (B) -BSL	YWF4D (R)-300PS (B) -BSL	YWF4D (R)-300PS (B) -BSL

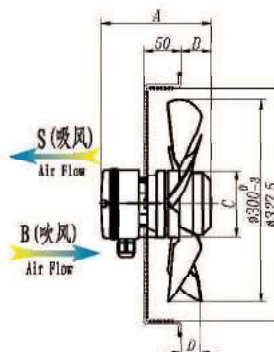

型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D (R)-300S (B) -BSZ	155	40	92	24	5
YWF2D (R)-300S (B) -BSL	162	47	92	37	5
YWF4D (R)-300MS (B) -B6L	175.5	60.5	102	51	6
YWF4D (R)-300PS (B) -BSL	155	40	92	40.5	5

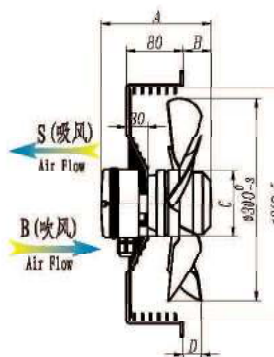


型号 MODEL	尺寸				叶片数量
	A	B	C	D	
YWF4D (R)-300S (B) -BSZ	155	40	92	24	5
YWF2D (R)-300S (B) -BSL	162	47	92	37	5
YWF4D (R)-300MS (B) -B6L	175.5	60.5	102	51	6
YWF4D (R)-300PS (B) -BSL	155	40	92	40.5	5

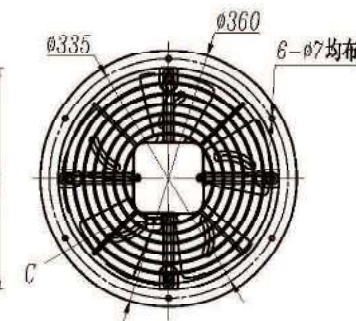


型号 MODEL	尺寸		叶片数量
	A	B	
YWF4D (R)-300S (B) -BSZ	92	45.5	5
YWF2D (R)-300S (B) -BSL	92	46.5	5
YWF4D (R)-300MS (B) -B6L	102	12.5	6
YWF4D (R)-300PS (B) -BSL	92	20	5

外转子轴流风机 YWF 300

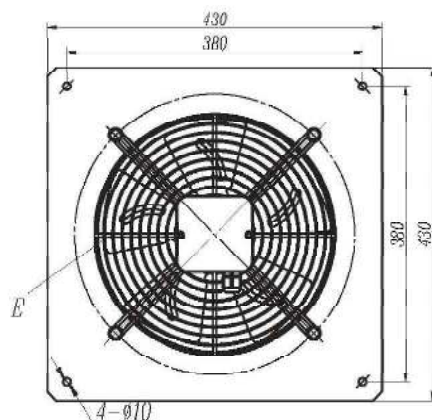


型号 MODEL	尺寸				叶片数量 D
	A	B	C	D	
YWF4D (B)-300S (B)-GSZ	155	94	6	92	5
YWF2D (B)-300S (B)-GSZ	162	101	7	92	5
YWF4D (B)-300MS (B)-GGL	175.5	114.5	34.5	102	6
YWF4D (B)-300FS (B)-GSZ	155	94	-10.5	92	5

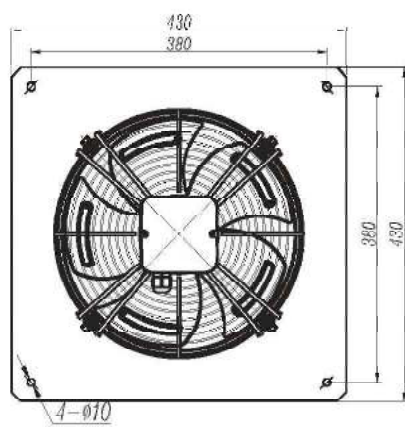

YWF 315 外转子轴流风机
Axial Fans



- **防护等级：IP54**
Type of protection: IP54
- **绝缘等级：“B” “F”**
Insulation class: “B” “F”
- **工作方式：S1**
Mode of operation: S1
- **轴承：免维护轴承**
Bearings: Maintenance-free bearings

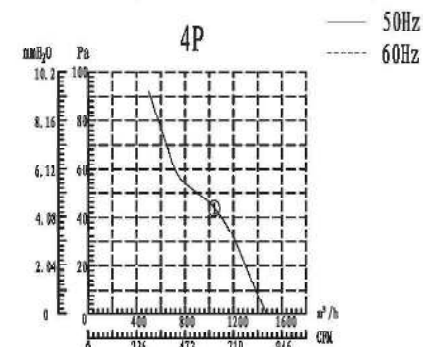

技术参数 Technical data

	曲线 Curve NO.	额定电压 Voltage	频率 frequency	额定电流 Current	输入功率 Power input	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 Air Volume	许用静压 Max. Static Pressure	净重 N.W.
型号 Model	#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa		kg
YWF4E-31SS (B)-BSL	①	220	50	0.4	85	1380	62	2	1475 / 65		3.8
YWF4D-31SS (B)-BSL		380	50	0.25	70	1400	62	/	1475 / 65		3.8

● 表中參數如有更改恕不另行通知 We will not inform you if we change the data in the form

